



PAVISE Euro 6

KEY FEATURES

Active Emergency Braking System (AEBS)

Lane Departure Warning System (LDW)

Vehicle Dynamic Control (VDC)

Electronic Braking System (EBS)

Forward Collision Avoidance Assist (FCA)

Traction Control System (TCS)

SRS Airbags Driver & Passenger

Driver's Suspension Seat

GVM 12,000 kg or 14,200 kg

GCM 21,500kg or 23,700kg

Power / Torque 300 hp / 1,078 nM

Transmission ZF 8 Speed Full Auto

Full Air Disc Brakes

Full air suspension or steel

Warranty - 5 years, or 300,000km*

READY BUILT. READY TO WORK.

*Terms and conditions apply.

Jul 26

MOTOR

Motor Type Turbo Charger Intercooler
4 stroke-cycle, water cooled
Direct-injection diesel engine

Number of cylinders 6 in-line

Piston Displacement (cc) 6,800cc

Max Power 300 hp

Max Torque 1,078 Nm

TRANSMISSION

Type Full automatic

Transmission ZF 8 Speed Full Auto

PTO Preparation for PTO

FRONT AXLE

Type Reverse Elliot type "I" beam

Capacity 6000kg

REAR AXLE

Capacity 9500kg

SUSPENSION

Type Air Suspension or Rigid Suspension,
Multi Leaf Spring front & rear

FUEL TANK

Capacity 250L Aluminium Fuel Tank

SAFETY FEATURES

Active Emergency Braking System (AEBS)

Electronic Braking System (EBS)

Vehicle Dynamic Control (VDC)

Lane Departure Warning (LDW)

Forward Collision Avoidance Assist (FCA)

Emergency Stop System

SRS Airbag

Traction Control

Daytime Running Lights

Auto Headlights

Driver & Passenger Airbag

Bluetooth Hands Free

Door Step Lamp

Heated Mirrors

Reverse Camera

BRAKES

Service Brake Full Air Disc Brake or Drum

Parking Brake Gradual parking valve operated Air System

WHEELS & TYRES

Wheel Type Single Front & Rear

Wheel Size Front, Rear: 19.5 x 6.75 Alloys

Material Steel or alloy

Front Tyre Size 285/70R19.5 16PR

Rear Tyre Size 245/70R19.5 18PR

DRIVING CONVENIENCE


Cruise control

Steering wheel mounted controls

Tilt & telescopic steering column


READY BUILT. READY TO WORK.

DIMENSIONS – (mm) / WEIGHTS – (kg)

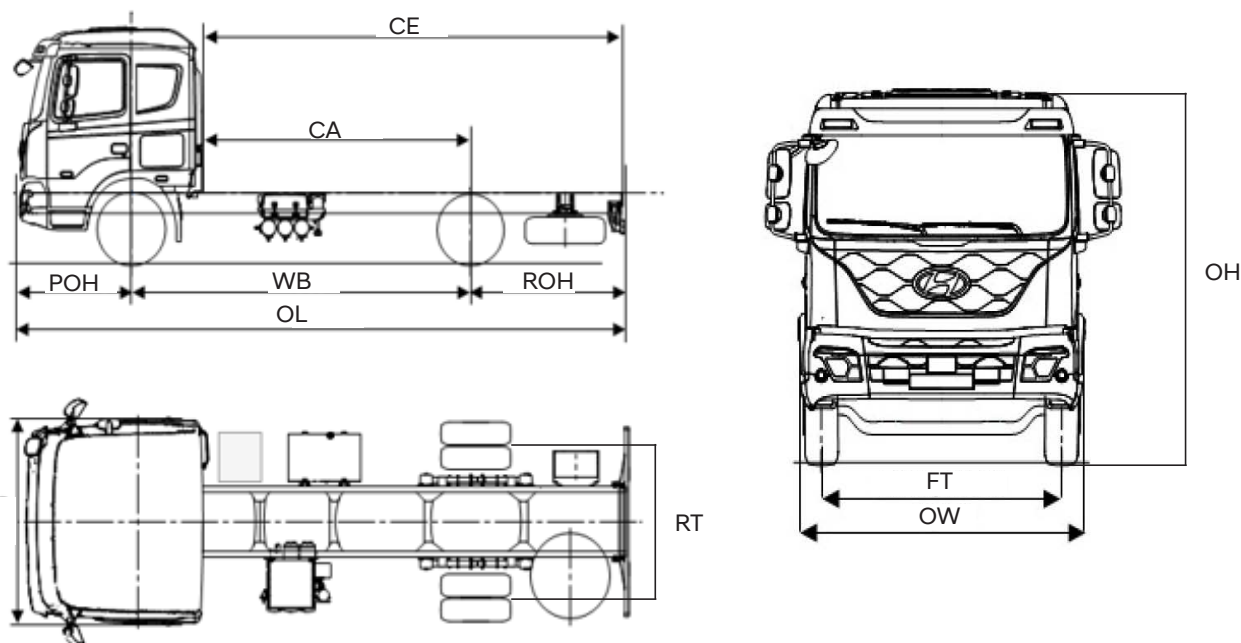

Wheelbase	LWB	ELWB	ULWB		LWB	ELWB	ULWB
Wheelbase (WB)	4,300	4,900	5,700	Front Track (FT)	1935/1945	1935/1945	1935/1945
Overall Length (OL)	7,665	8,615	9,765	Rear Track (RT)		1800/1813	
Overall Width (OW) *	2,320	2,320	2,320	Curb Weight	4,755	4,820	5,080
Overall Height (OH)	2,646	2,646	2,646	Front Curb Weight	3,315	3,350	3,435
Cab to Axle (CA)	3,350	3,950	4,750	Rear Curb Weight	1,440	1,470	1,495
Front Over Hang (FOH)	1,415	1,415	1,415	Gross Vehicle Weight		15,500	
Rear Over Hang (ROH)	1,950	2,300	2,650	Gross Combined Weight	25,000	25,000	25,000
Cab to End (CE)	5,320	6,270	8,310	Front Axle Capacity		6,000 (7,500 D2)	
				Rear Axle Capacity		9,500	

*Width excludes mirrors
Dimensions accurate to +/- 5%

HYUNDAI PAVISE WARRANTY

MEDIUM DUTY RANGE	AXLE CONFIGURATION	STANDARD WARRANTY (which ever comes first)	CAB CORROSION / PERFORATION
PAVISE	4x2	5 Years or 300,000km (effective from 2021 production)	5 years

Battery warranty – 12 months from date of delivery

* For conditions, refer to the Hyundai Trucks Parts & Service warranty manual

Disclaimer: Hyundai Trucks New Zealand reserves the right to alter vehicle specifications and equipment levels without notice. Some equipment featured on the vehicle in this brochure may not be available in New Zealand or may be optional to the extent permitted by the law. Hyundai Trucks New Zealand shall not be liable to any person as a result of reliance on the content of this document. Please consult your Hyundai Truck Dealer for the latest specifications, equipment levels, options, prices, colours and vehicle availability. Note: Information in this brochure is current as at 31/11/2025.

LOOKING FOR SOMETHING ELSE? TALK TO US ABOUT CUSTOMISED OPTIONS

AVAILABLE FACTORY BODY OPTIONS



REFRIGERATED/BOX BODY

Customised solutions available.



RUBBISH COMPACTOR

Plate compact or roll pack.
Cubic capacity built to suit.



TOOLBOX TIPPER

750mm lockable cabinet
6 cube tipping bin
FOB Hoist



FACTORY CURTAINSIDER

10 pallet to 16 pallet options.
Built to individual specifications.